

Features & Benefits


- High energy density and voltage
- Long, stable power with a flat discharge voltage
- Ideal for portable communications, portable computing, and robotics.

Specifications

Rated capacity ⁽¹⁾	Min. 2650mAh
Capacity ⁽²⁾	Min. 2700mAh Typ. 2800mAh
Nominal voltage	3.7V
Charging	CC-CV, Std. 1890mA, 4.30V, 3.0 hrs
Weight (max.)	49.0 g
Temperature	Charge: 0 to +45°C Discharge: -20 to +60°C Storage: -20 to +50°C
Energy density ⁽³⁾	Volumetric: 576 Wh/l Gravimetric: 204 Wh/kg


⁽¹⁾ At 20°C ⁽²⁾ At 25°C ⁽³⁾ Energy density based on bare cell dimensions

Dimensions

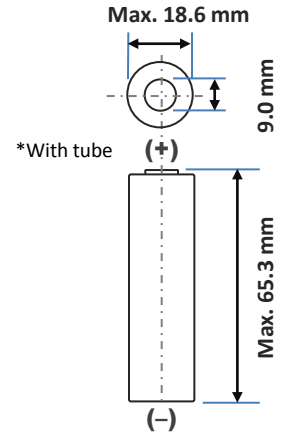


For Reference Only


Charge Characteristics

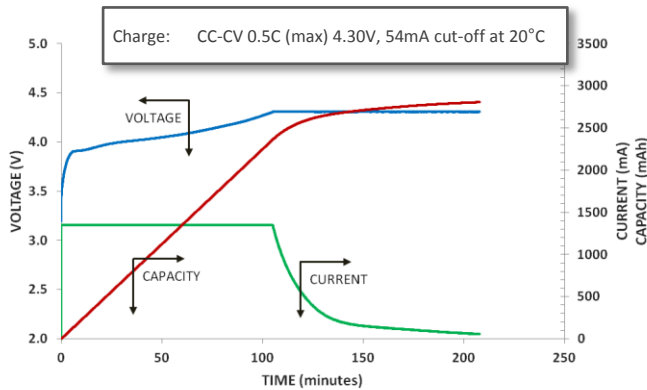


Cycle Life Characteristics

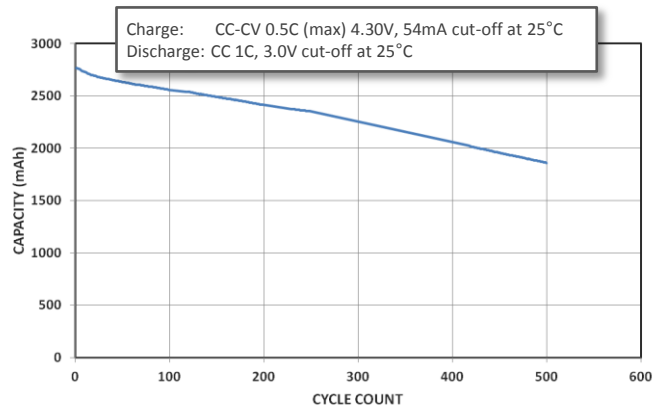

Discharge Characteristics (by temperature)

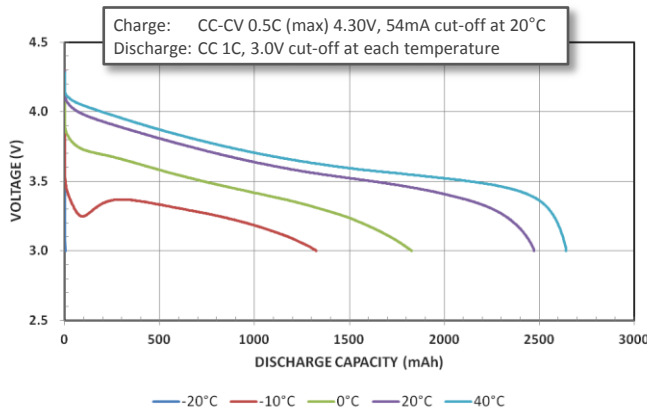

Discharge Characteristics (by rate of discharge)

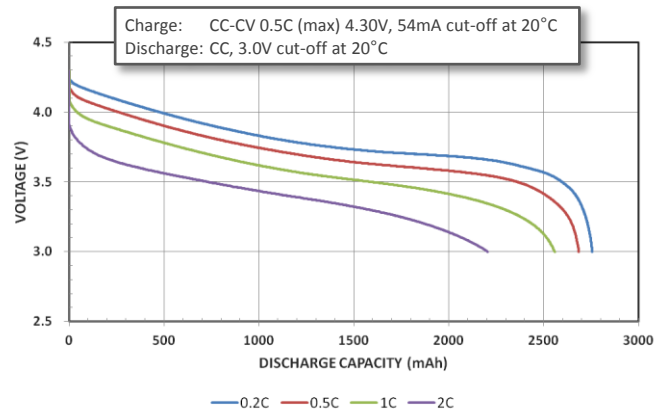

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.